
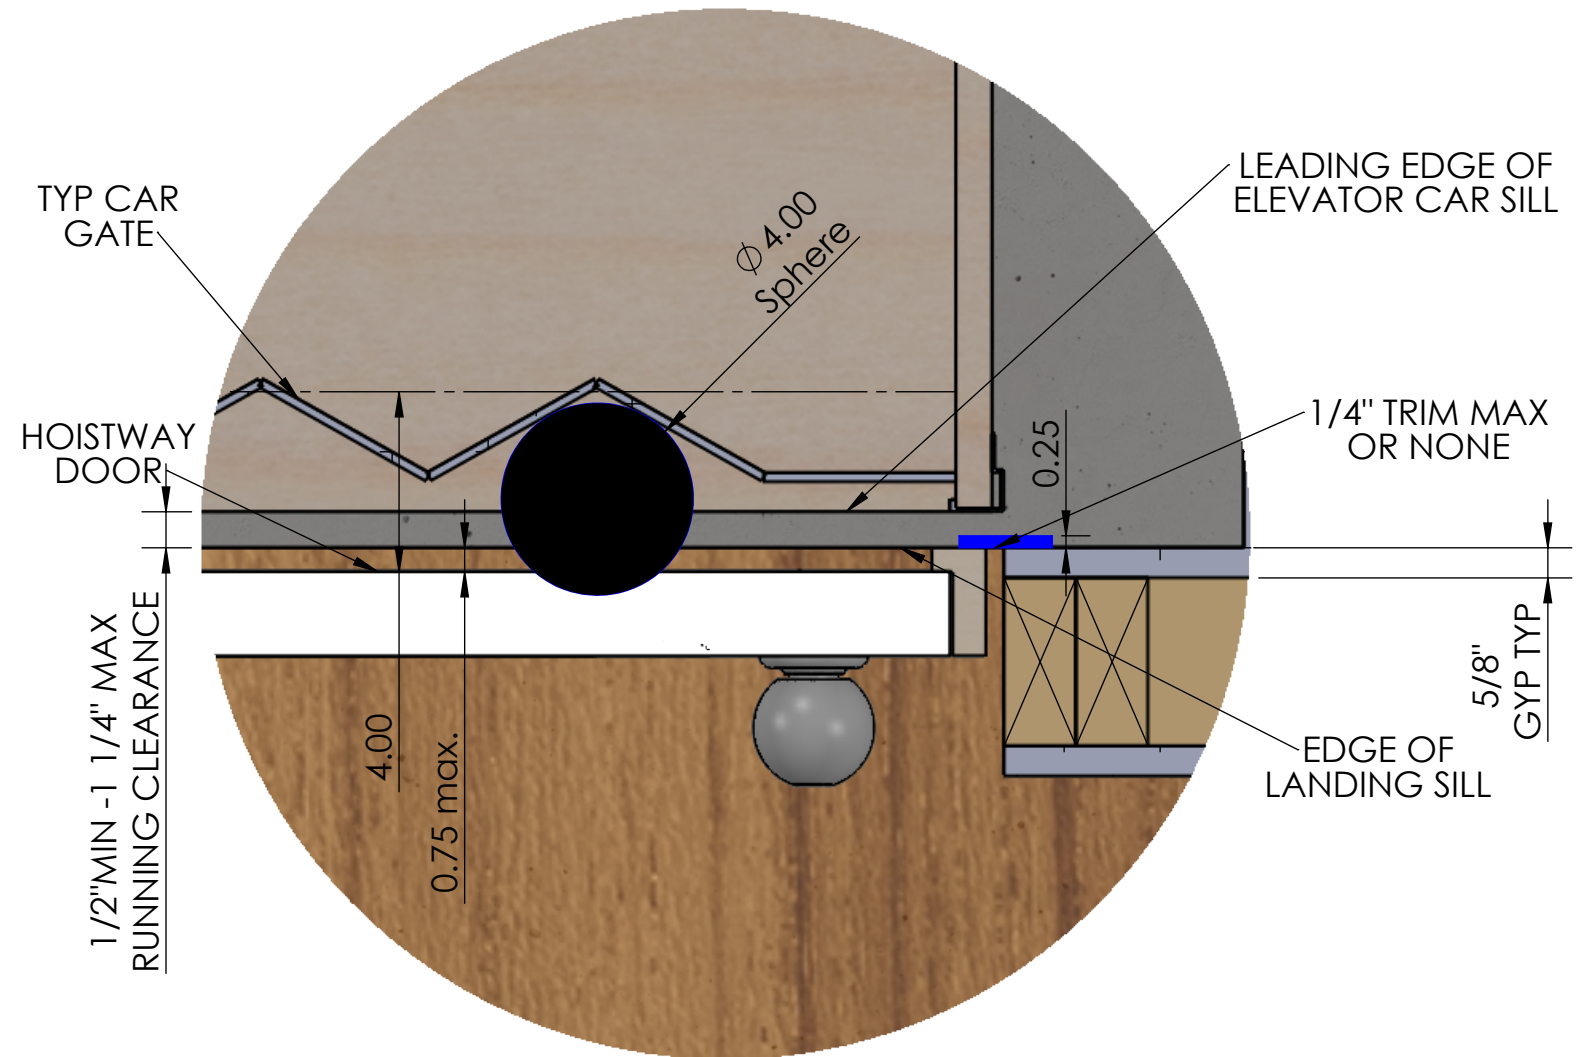


TYPICAL ELEVATOR HOISTWAY

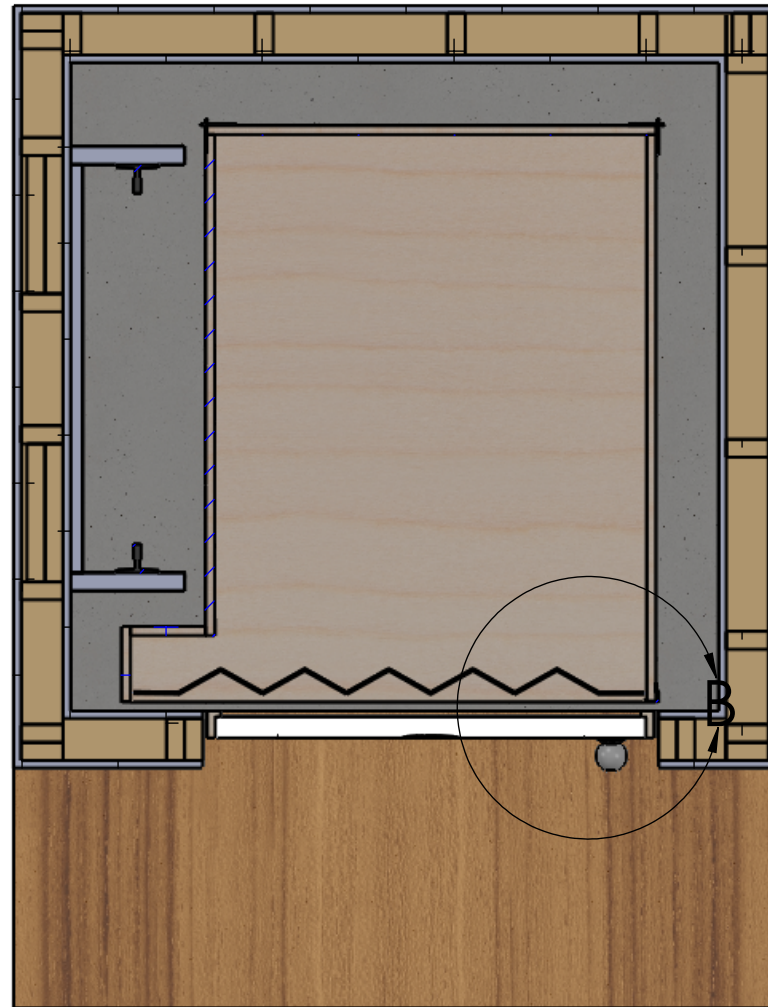

***SHOWN WITH OPTIONAL
PLI FLUSH MOUNT DOOR KIT**

While Precision Lift Industries manufactures to the latest A17.1 Section 5 requirements, not all states and jurisdictions have adopted the latest edition. It is the responsibility of the elevator installer/dealer to ensure compliance with local codes and jurisdictions when ordering and installing PLI equipment.

A17.1 National Safety Code for Elevators - Section 5 - 2016 Edition

5.3.1.8.3 Clearances between hoistway doors and car door or gates must not exceed 4".

5.3.1.7.2 The distance between the hoistway door and the edge of the landing sill must not exceed 3/4".

Florida Building Code 2016

R321.4 Clearance requirements between elevator doors for elevators inside private residence.

(a) The distance between the hoistway face of the the hoistway door and the hoistway edge of the landing sill may not exceed 3/4 inch for swinging doors and 2 1/4 inches for sliding doors.

AUG 2020

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PRECISION LIFT INDUSTRIES, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PRECISION LIFT INDUSTRIES, LLC IS PROHIBITED.

