




TOP VIEW

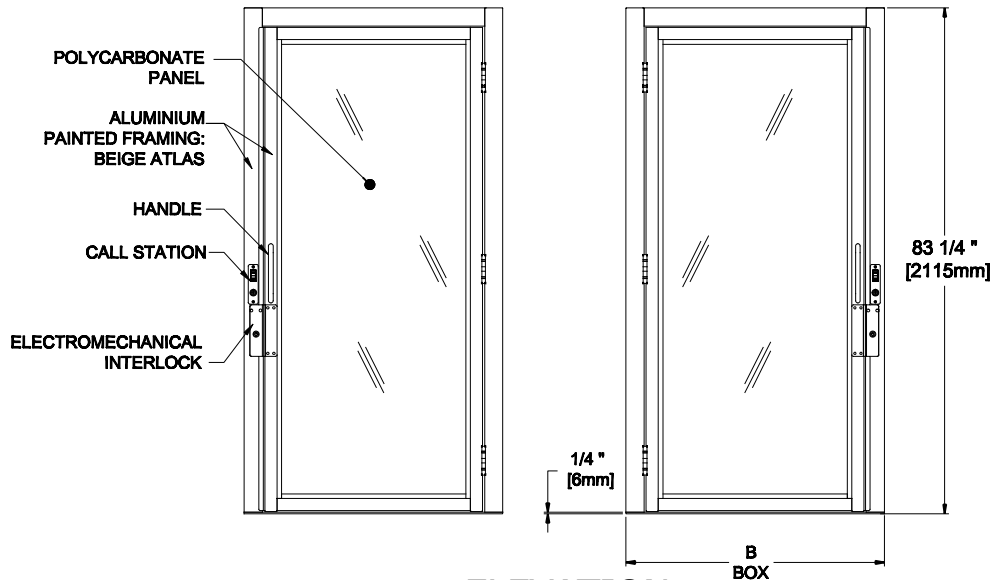

ELEVATION

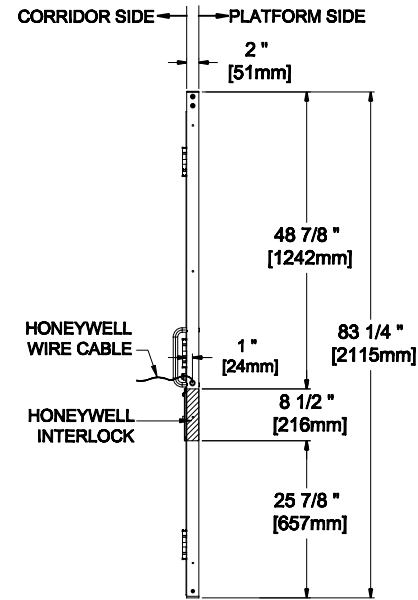

SIDE VIEW




OPEN RIGHT DOOR

OPEN LEFT DOOR

INSTALLATION FOR

- 1) LEAVE A 3/4" SPACE ON EACH SIDE OF THE DOOR TO ALLOW SIDEWAY ADJUSTMENT ON SITE
- 2) THE LATCH SIDE JAMB OF THE LANDING DOOR MUST BE FLUSH WITH THE INNER FACE OF THE PLATFORM'S SIDE WALL.



SECTION A-A

1 POLYCARBONATE DOOR

A=DOOR	B=BOX	C=OPENING	D=CLEARANCE
32''[813mm]	38 1/2''[979mm]	32 1/2''[813mm]	30 1/2''[775mm]
34''[864mm]	40 1/2''[1030mm]	34 1/2''[864mm]	32 1/2''[826mm]
36''[915mm]	42 1/2''[1081mm]	36 1/2''[915mm]	34 1/2''[876mm]
38''[965mm]	44 1/2''[1132mm]	38 1/2''[965mm]	36 1/2''[927mm]
40''[1016mm]	46 1/2''[1182mm]	40 1/2''[1016mm]	38 1/2''[978mm]
42''[1067mm]	48 1/2''[1233mm]	42 1/2''[1067mm]	40 1/2''[1029mm]

GENERAL DOCUMENT,
INFORMATIONAL PURPOSES ONLY

AmeriGlide
Accessibility Solutions

AmeriGlide, Inc.
5110 Atlantic Ave
Raleigh, NC 27616
1 (800) 790-1635

TITLE: GENERAL INFORMATION

NO. DRAWING	P-05	DATE	12/13/2018	REVISION	5
CODE	B-305 - B-613	DRAWER	M. DEBUSSCHERE	NO. SHEET	1/1